

CubicPOS Series



TYSSO®

Insist on the Best



Integrated POS System

FEATURES


- The **CubicPOS** is a durable, smart and compact sized touch screen PC specially designed for the heavy-duty, retail/POS applications.
- The 12.1" touch screen/TFT monitor can be positioned at any vertical angles between 0 to 90 degree.
- The **CubicPOS** provides various hardware interfaces such as USB, parallel, and etc.
- RS-232 ports are supplied with selectable +5V or +12V power. The advantage enables the related POS equipments to operate without the external power adapter.
- The network-ready **CubicPOS** is equipped with a 10/100 Base T Ethernet adapter.
- Optional POS components can be intergrated to the terminal include customer display, magnetic stripe card reader, barcode slot reader and more.
- A user-friendly attachable rear plate has made for easy plug-in/out cables, and that can also cover up the untidily and important device cables.

SPECIFICATIONS

| | |
|----------------------|---------------------------------------------------------------------------------|
| CPU supported | VIA C3 processor 1 Ghz on board (800 Mhz or 533 Mhz optional) |
| Chipset | VIA VT8601 (North Bridge) and VT82C686B (South Bridge) |
| BIOS | AMI Flash BIOS |
| System memory | 256 MB SDRAM (128MB and 512MB optional) |
| Enhanced IDE | support EIDE devices, Ultra DMA transfer 33/66/100 mode and BIOS auto-detect |
| Graphic | 2D/3D graphic controller with SMA up to 8MB |
| Audio output | AC-97 2.0 compliant |
| Power management | Support power saving modes including APM 1.2 compliant |
| Power type | Support ATX power supply |
| LAN | 10/100 base T/TX support, full duplex, boot from LAN, compliant with IEEE802.3X |
| HDD | 2.5" 15GB up |
| FDD/CDROM (optional) | 1 x 2.5" FDD (1.44MB) slim type 1 x 2.5" CDROM 24X slim type |
| LCD panel | 12.1" (30.8cm), 180 cd/m ² |

| | |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Touch panel | Resistive type 5 wire |
| Tilt adjustment | from 0 to 90 degree |
| Power supply | 85W |
| I/O & Expansion Interface | 4 x RS-232 ports (with or without +5V or +12V) 4 x USB 2.0 port 1 x printer port (2 nd is optional) 1 x VGA port 1 x PS/2 keyboard port 1 x PS/2 mouse port 1 x LAN RJ45 connector 1 x MIC in phone jack with 0.25W amplifier 1 x Speak out phone jack with 0.25W amplifier |
| Stand color | Black |
| MSR | 1 x triple track (barcode scanner is optional) |
| Safety | FCC, CE |
| Operation condition | 0°C to 40°C (32°F~104°F), 20%RH-80%RH, non-condensing maximum wet bulb 28.9°C (84°F) |
| Storage condition | -20°C to 60°C (-8°F~140°F), 10%RH-80%RH, non-condensing maximum wet bulb 26°C (79°F) |

DIMENSIONS:

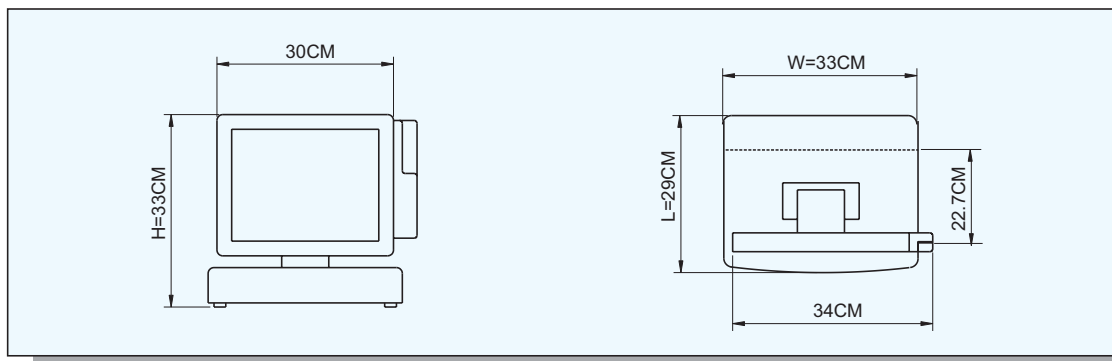

TYSSO[®]
Insist on the Best

Manufacturer

FAMETECH INC.

2F, No. 165, Sec. 2, Ta-Tung Rd.,
Hsi-Chih 221, Taipei Hsien, Taiwan
Tel : 886-2-8692-6300
Fax: 886-2-8692-6301
E-mail: tyssso@ms6.hinet.net
URL: <http://www.famotech.com.tw>

